# High-response directional control valve, pilot operated

## Type 4WRDE



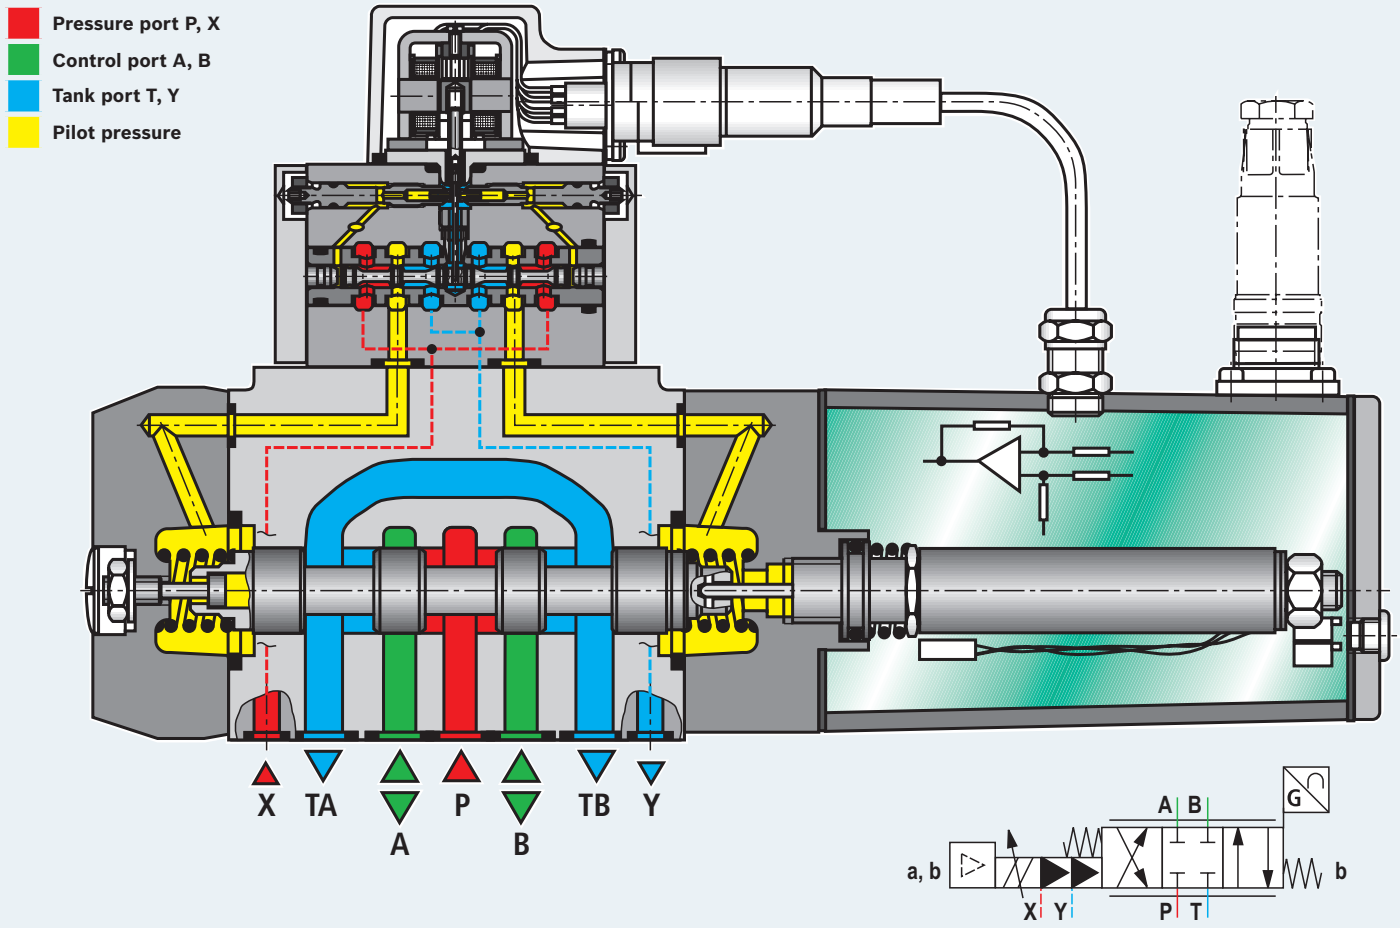


**Features**

- High-Response Directional Control Valve, pilot operated with electrical feedback of the spool position and integral control electronics
- Controls direction and volume of a flow
- Ideal for closed loop position-, velocity-, pressure- and force control
- Piloted by means of a 2-stage servo valve size 6

**Technical Data**

- Maximum operating pressure:
  – 315 bar (size 10)
  – 350 bar (size 16 ... 32)
- Maximum flow 1600 l/min
- Maximum hysteresis ≤0,2 %


All rights reserved – Subject to revision